


TUMBLE DRYERS

TRD 11 • 14 • 16

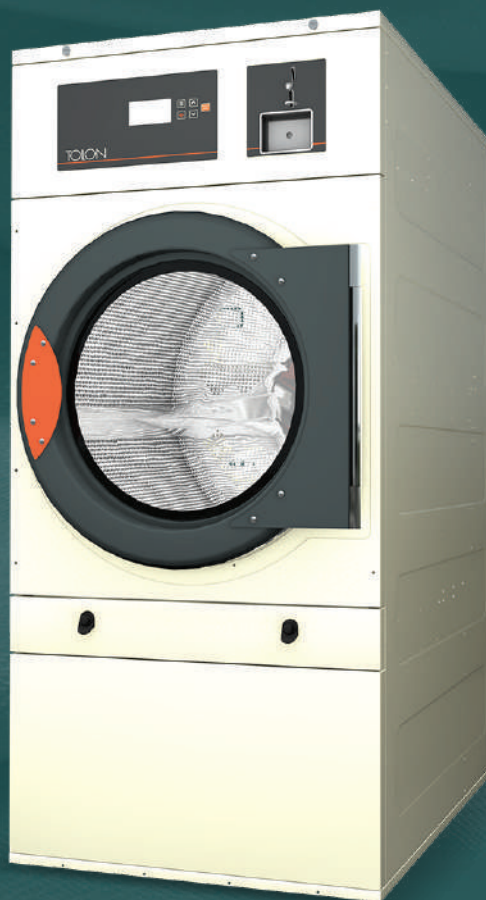

STANDARD FEATURES & BENEFITS

- Tumble dryer in skin plate, cream color
- Big loading door
- Direct drive through a gearbox, no pulley
- Time and temperature selection
- Reverse drum: all models offer the reverse turning of the drum
- Drum in galvanised steel
- Digital control, electronic control. Easy and intuitive to use, the electronic control offers complet control of the process
- Mixed axial - radial airflow circuit
- Filter door with wide surface and improved airflow. Filter grid is standard 0,3 mm
- Cool down: anti-wrinkle at the end of cycle
- Models available in electric, gas or steam heating
- Self-service: Digital range has several payment options for laundromats; to work with centralized payment systems, with coin/token or prepay card systems. (Electric and gas heated models)

OPTIONS

- Moisture control
- Double doorglass
- Stainless steel body
- Stainless steel front panel
- Low pressure steam battery
- Opposite door opening
- Lint filter with 0,6 or 1,2 mesh
- Wooden box packing
- Special voltages
- Electronic coin kit
- Prepared for central payment

TOLON

TUMBLE DRYERS

TRD 11 · 14 · 16

MODEL			TRD11	TRD14	TRD16
CAPACITY					
Dry load	1/20	kg	10,5	13,5	16,5
	1/18	kg	12	15	18
Performance		kg/h	28,6	30,3	31,9
Evaporation rate*		l/h	14,5	15,4	16,3
DRUM					
Drum diameter		mm	750	750	750
Drum depth		mm	475	610	746
Drum volume		l	210	270	330
DOOR (ROUND)					
Door opening Φ		mm	574	574	574
Center door height		mm	976	976	976
Bottom door height		m	689	689	689
POWER					
Drum motor		kW	0,37	0,37	0,37
Fan motor		kW	0,25	0,25	0,25
Electric heating		kW	12	18	18
Total electric power		kW	12,67	18,67	18,67
Gas heating		kW	20,51	20,51	20,51
Steam heating		kW	30	30	30
CONNECTIONS					
Voltage 230V- I + N + T	Electric	N° x mm ² / A	3 x 35 / 63A	n/a	n/a
	Steam/Gas	N° x mm ² / A	3 x 1,5 / 20A	3 x 1,5 / 20A	3 x 1,5 / 20A
Voltage 230V- III + T	Electric	N° x mm ² / A	4 x 10 / 40A	4 x 16 / 63A	4 x 16 / 63A
	Steam/Gas	N° x mm ² / A	3 x 1,5 / 20A	3 x 1,5 / 20A	3 x 1,5 / 20A
Voltage 400V- III + N + T	Electric	N° x mm ² / A	5 x 4 / 25A	5 x 10 / 32A	5 x 10 / 32A
	Steam/Gas	N° x mm ² / A	3 x 1,5 / 20A	3 x 1,5 / 20A	3 x 1,5 / 20A
$\emptyset$ Gas inlet		BSP	1/2"	1/2"	1/2"
$\emptyset$ Steam inlet		BSP	3/4"	3/4"	3/4"
$\emptyset$ Condenser	Steam	BSP	3/4"	3/4"	3/4"
DIMENSIONS (WxDXH)					
Net		mm	785 x 840 x 1694	785 x 989 x 1694	785 x 1110 x 1694
Packed		mm	865 x 940 x 1840	865 x 1074 x 1840	865 x 1210 x 1840
WEIGHT					
Net		kg	172	180	187
Packed		kg	180	190	200
EXHAUST DATA					
Exhaust Connection Φ		mm	200	200	200
Airflow	max	m ³ /h	850	850	850
SOUND PRESSURE					
Sound level		db(A)	64	64	64

* It may vary depending on the type of heating, filter cleanliness or extraction type.